# Interlocking Drainage Mat Diamond Flex-Lok™ 620

Starting at
**$11.00**

## Product Images

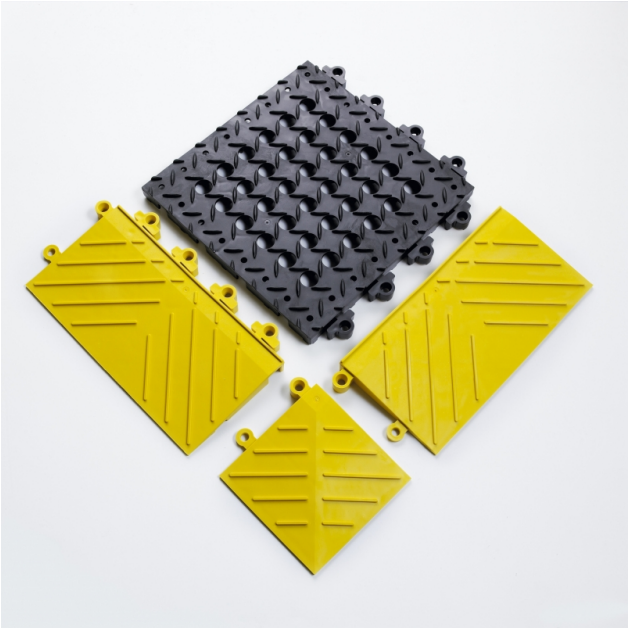

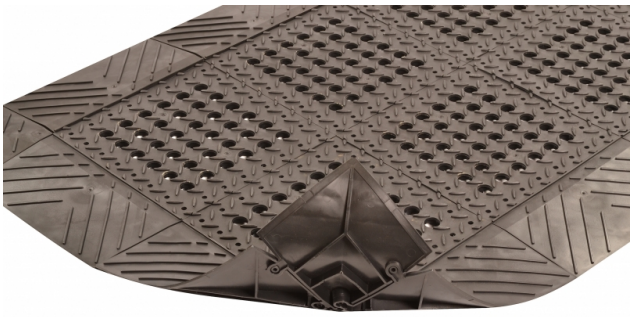

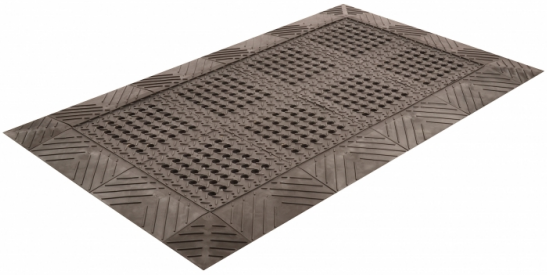

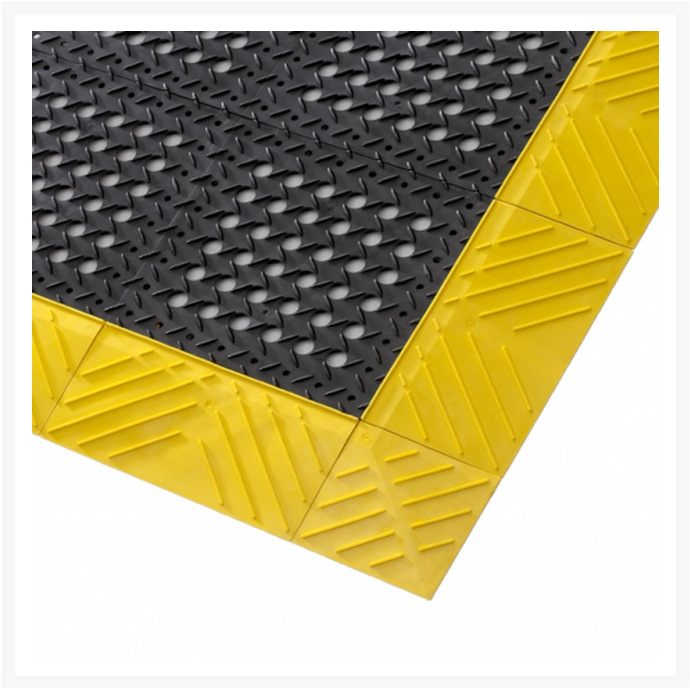

## Short Description

- PVC drainage modular interlocking tile with raised diamond top surface for traction and greater resistance to industrial chemicals
- Ergonomic, multi-tiered design allows liquid to continuously flow underneath the mat and allows the underside to breathe. Elevates the mat from the floor.
- Spring-back design, engineered to cushion the impact of long-term standing. Allows the mat to flex with the weight of the worker.
- Black tiles & ramps made from 100% recycled PVC
- Highly resistant to industrial chemicals
- Stock size mats have beveled edges permanently affixed on 3 sides
- Accessories: 12x12" Tile (black only) 6x12" Ramps 6x6" Corners

## Description

Diamond Flex-Lok™ is a high-performance modular matting system that combines the durability and toughness of an industrial mat with true ergonomic support and comfort. The ergonomic properties of Diamond Flex-Lok™ are the result of a multi-tiered footing design that elevates the mat off the floor, creating air pockets that allow the mat to flex with the weight of the worker. A large hole drainage system facilitates the removal of liquids and debris from the work area while a pronounced raised diamond pattern on the mat surface, and an inverted-V pattern on the ramps provide additional traction. Diamond Flex-Lok™ is manufactured from 100% recycled PVC for greater resistance to industrial chemicals, cutting fluids, oils and greases. A unique interlock system that comes apart only when you want it to allows for easy reconfiguration. Create your own workstation configuration or select an assembled stock size.

## Specifications

| | |
|---|---|
| Model No | 620 |
| Brand | NoTrax |
| Available Colors | Black; Black/Yellow |
| Thickness | 1" |
| Overall Thickness | 1 |
| Standard sizes | 30"x 36"; 30"x 48"; 30"x 60"; 30"x 72"; 30"x 96"; 42"x 72"; 42"x 96"; 42"x 120" |
| Group | Ergonomic, Anti-fatigue & Safety Matting |
| Environment | Wet/Dry and Oily Areas |
| Special Characteristics | Available yellow borders along sides comply with OSHA code 1910-144\|Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals |
| Recommended Use | In manufacturing plants, production lines, assembly lines, CNC machines, metal working, fabrication |
| Special Remarks | Factory-assembled custom configurations available - Call Customer Service for more information (800) 621-2802 |
| Edges | Attachable beveled edges are available |
| Usage Intensity | Heavy duty |
| Installation | The modular matting system consists of 12in x 12in modular tiles that interlock for on site installation with a rubber hammer. |
| Material Specifications | PVC (DOP free) |
| Surface Detail | Industrial Diamond Plate |
| Mat Type | Runner, Work Station |
| Process | Injection Molding |
| Weight Lbs/sqft | 2.1 |
| Performance Features | Oil Resistant, Chemical Resistant |
| REACH Compliant | Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals). |

| | |
|---|---|
| Anti-Fatigue Rating | Superior |
| Slip Resistance Rating | Superior |
| Wear Resistance Rating | Superior |

## Prop 65

⚠**WARNING:**This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov.

## Product Options

| | |
|---|---|
| Color: | Black |
| | Black/Yellow |
| Dimensions: | 2.5ft x 3ft |
| | 2.5ft x 4ft |
| | 2.5ft x 5ft |
| | 2.5ft x 6ft |
| | 2.5ft x 8ft |
| | 3.5ft x 10ft |
| | 3.5ft x 6ft |
| | 3.5ft x 8ft |